

LED

IP
66



Application

This product is widely used in high-voltage cable lines, ground dangerous places as warning signals, also used in construction, operation monitoring, emergency and other places for signal prompts and azimuth display.

Characteristics

- The product adopts international brand high-brightness LED, and the brightness is more than 2 times higher than similar products.
- The product has a unique light distribution, a wide range of illumination angles, and uniform illumination within the illumination range.
- The overall weight of the product is light, reducing the load on the high-voltage cable.
- The product can be discharged for 50 hours in a dark environment when the battery is fully charged.
- With multiple monocrystalline solar panels, the charging time efficiency is 1.5 times higher than that of ordinary solar panels.
- Customized professional tools for easy and convenient installation and removal of strobe lights.
- Optional, with different mounting accessories, to achieve a variety of installation methods to meet customer and corresponding site installation requirements.
- Product intelligent setting, quickly covers the solar panel 3 times in 3 seconds, enter the sleep state, easy to pack, transport and store.


Main Specification

Item	Unit	Technical Parameters
Lamp Wattage	W	1
Solar maximum power	W	1.5
IP grade	/	IP66
Battery	Rated capacitance	mAh
	Rated voltage	V
Lighting time	h	50
Lighting mode	Hz	1Hz
Working temperature	°C	-30~+50
Visible distance	M	1000
Scope of application	/	Could work normally under the electromagnetic environment of 0.4kV-220kV transmission circuit or distribution circuit.
Applicable high voltage cable outer diameter	mm	φ8-φ31
Dimensions	mm	φ101×212
Net weight	g	245±5


ZW4308 Solar Warning Light

TORMIN


Drawing of dimension (Dimensions in mm)

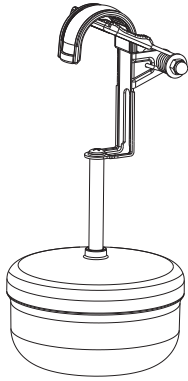


Hook type




Magnet adsorption type



Side wall type

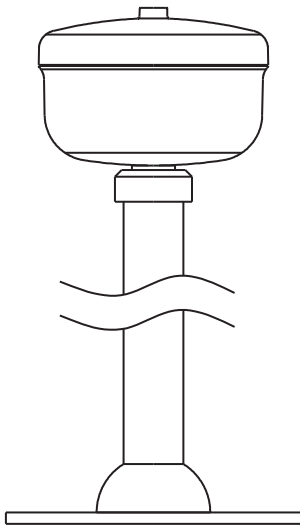

Pole type

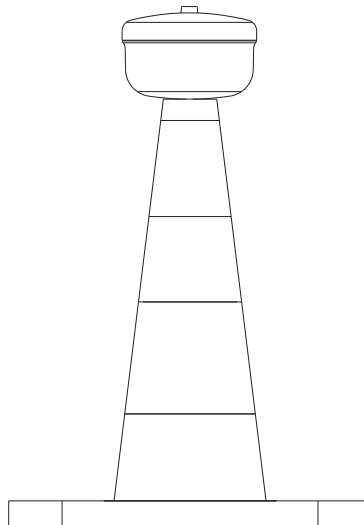

Safety cone type

Order number	Mounted type	Accessories	Note
ZW4308H	Hook type	Special installation and removal tools	
ZW4308T	Magnet adsorption type		
ZW4308W	Side wall type		
ZW4308P	Pole type		
ZW4308S	Seat type (Safety cone)	Safety cone	Accessories purchase