




### Drawing Of Dimension (Dimensions in mm)

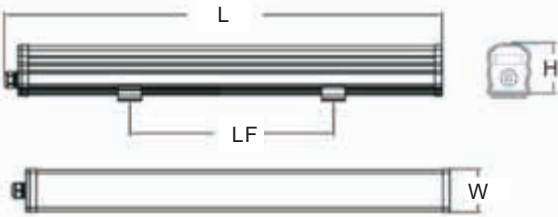

Order No.	L(mm)	W(mm)	H(mm)	LF(mm)
ZY5321-L18	656	75	72	600
ZY5321-L36	1256	75	72	1200
ZY5321-L48	1556	75	72	1500

### Ordering reference

Ordering Reference	Rated wattage (W)	Light output (lm)
ZY5321-L18	18W	2600
ZY5321-L36	36W	5200
ZY5321-L48	48W	6500

### Application

Ideal to be used in auxiliary workshop, control room, channel and other indoor and outdoor lighting.

### Characteristics

- The main body of lamp is an one-piece structure, made of integral shell and adopts anti-UV treatment. It solves the problems of traditional fluorescent lamp, such as waterproof, dustproof and easy to change color and brittle .
- High light efficiency, 36W can replace 2 × 40W fluorescent lamp.
- Wide voltage power supply with efficient and long life time, strong performance of anti-high voltage shock. Suitable for used in industrial places, to ensure long-term stability of the lamps work.
- Anti-glare design, soft light.
- Product appearance simple, beautiful.

### Main Specification

Item	Technical Parameters
Rated voltage (V)	220~240VAC
Rated frequency	50Hz / 60Hz
Life time (h)	50,000
CCT	4000K (3000K/5000K Optional)
CRI	70 Ra
Leading-in cable diameter	φ 6mm~ φ 8mm
Net weight (kg)	0.72(18W); 1.2(36W); 1.5kg(48W)

### Mounting option

